


Square Wave Wet Inlay  
EPC Class 1 Gen 2, ISO 18000-63  
Impinj M730  
Sales code 3008140

### Mechanical dimensions

A1 x A2	Antenna size	93 x 11 mm	± 0,5 mm	3.661 x 0.433 in
B1 x B2	Die-cut size	97 x 15 mm	± 0,2 mm	3.819 x 0.591 in
C	Web width	100 mm	± 0,5 mm	3.937 in
D	Pitch, length per piece MD	20 mm	± 1,5 mm	0.787 in
E	Die-cut to web edge	1.5 mm	± 1,5 mm	0.059 in
U	Die-cut corner radius	3 mm		0,018 in

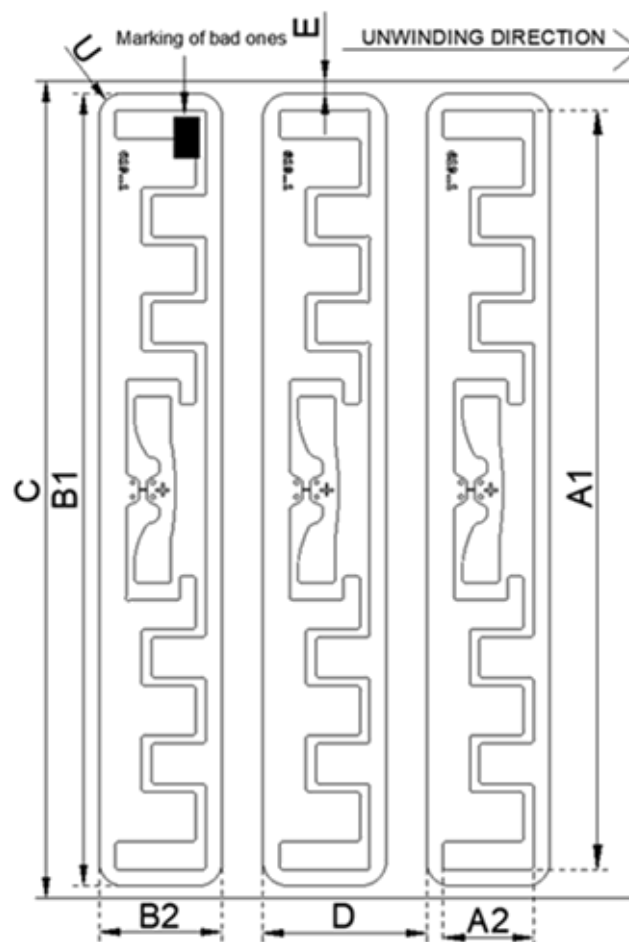

### Electrical characteristics

Integrated Circuit (IC)	Impinj M730
Air interface protocol	EPC Class 1 Gen 2, ISO 18000-63
Operation frequency	860 - 960 MHz
Memory	128 bit EPC


### General characteristics of transponder

Operating temperature (electronics parts)	-40 °C / +85 °C	-40 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

### Delivery form

Transponder format	Die-cut	
Transponder face material	White PET 50 UL	
Transponder antenna material	Aluminum	
Transponder adhesive	RA-5	
- labelling temperature	min. +0 °C	min. 32 °F
- usage temperature	-20 °C - 80 °C	-4 °F - 176 °F
- peel	min. 10 N / 25 mm (FTM 1)	
Final inspection	100 %, known faulty ones marked	
Minimum delivery yield	97 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	

### Structure

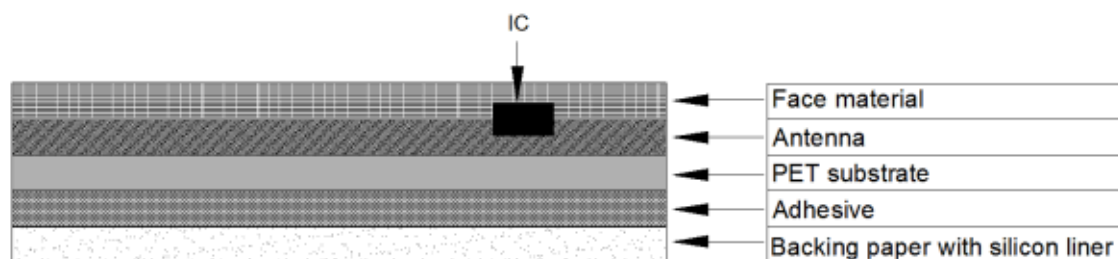

### Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Winding of the reel	Face out
Reel size	20000 pcs/reel
Package size	20000 pcs/box Deliveries only in full packages.

**Disclaimer:**

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

Products classified as CES samples have the released for production (RFP) product's form factor, RF performance and IC functionality. CES samples represent the RFP products in most aspects. CES samples are delivered without any warranty. During the CES phase, SMARTRAC reserves the right to modify product specifications without notice.

This technical specification replaces all earlier ones.

Version	1
Update date	15 July 2021
Author	SMARTRAC / TKailasvuo
Approved	SMARTRAC / 20/07/2021 SKarpinski

