

TAG SPECIFICATION

ECO Hanger Paper Tag
Sales code 500185
NXP UCODE 9




General specification and characteristics

Operating frequency	860-960 MHz
Air interface protocol	EPC Gen2v2.1, ISO 18 000-63
EPC memory	96 bit, 0 bit
Operating temperature (electronics)	-40 °C...+85 °C / -40 °F...+185 °F
ESD voltage immunity	± 2 kV peak HBM
Shelf life: 1 year (from manufacturing date)	+20 °C / +68 °F, 50 % RH
Bending diameter	> 50 mm, tension less than 10 N

Mechanical specification

Dimension	Item	Metric [mm]	Tolerance [mm]	US [in]
A1 x A2	Antenna size	52 x 32	± 0,5	2,047 x 1,260
B1 x B2	Die-cut size	54 x 34	± 0,5	2,126 x 1,339
C	Web width	60	± 1,0	2,362
D	Pitch length per piece (MD)	38,1	± 0,5	1,500
E	Die-cut to web edge	3	± 1,0	0,118
F	Radius	2	± 0,2	0,079

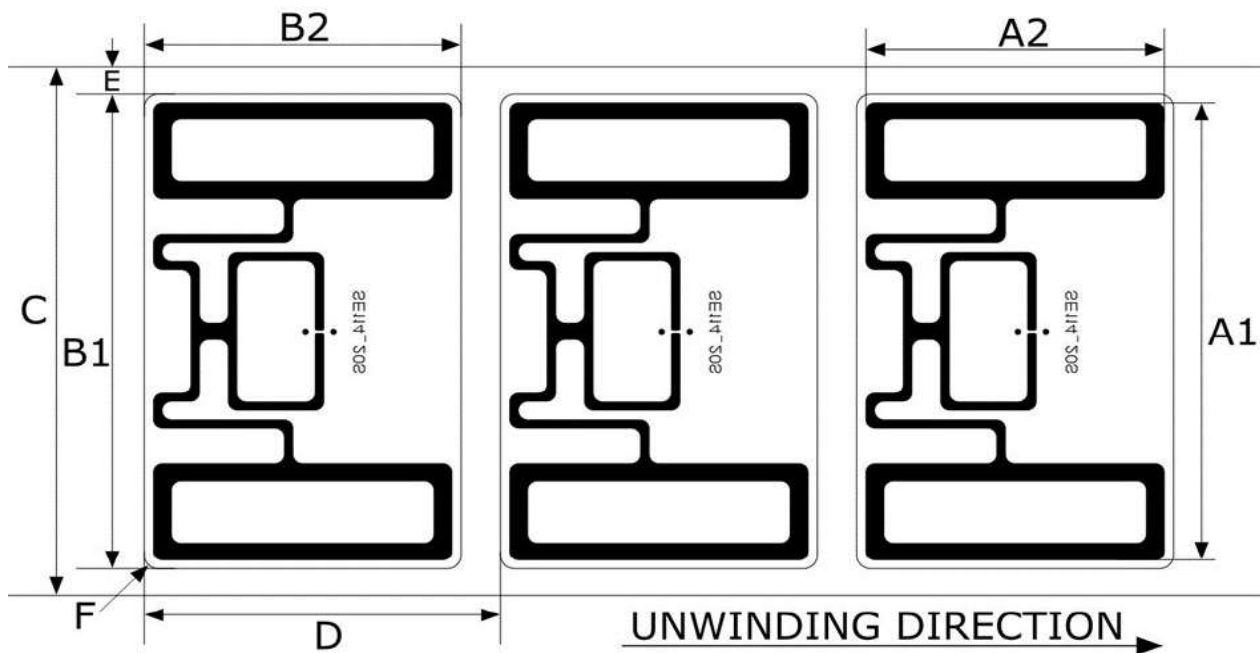

Cross section



Tag characteristics		
Tag format	Die-cut paper label on reel	
Tag face material	White woodfree paper, 88 um	
Tag antenna material	Conductive paste	
Tag adhesive	Permanent PSA	
- Min. labelling temperature	+5 °C	+41 °F
- Service temperature	-5...+60 °C	+23...+140 °F
- Peel min.	3 N / 25 mm (FTM 2)	

Delivery details	
Standard delivery yield	> 99%, Bad tags marked
Minimum delivery yield	> 97%
Appearance	Single row reel form
Reel core	Card board core, inner diameter 76 mm (3 in)
Winding of the reel	Face out
Reel size	3 500 pcs/reel. Diameter: < 204 mm
Package size	21 000 - 28 000 pcs/box.

Compliances



Disclaimer:

Beontag RFID reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used beyond our control we cannot be held liable for any damages caused when using the product. Use extra care in handling the product and observe standard storage and handling practices to minimize ESD (electro static discharge). This technical specification replaces all earlier ones.

Version history	Document history	Date	Author
1.0	Created	17.5.2021	EMH
1.1	Drawing updated	18.5.2021	EV
1.2	Drawing updated	16.6.2021	AM
1.3	100% yield changed to 97%	16.9.2021	JI
1.4	Logo, delivery yield and disclaimer updated	28.9.2021	MKT
1.5	Bad tag handling updated	26.11.2021	JI
1.6	Box quantity updated	5.1.2022	JI